

FEATURES

- | Glass Passivated Junction Chip
- | Ideal For Automated Placement
- | Super Fast Recovery Time For High Efficiency
- | Built-in Strain Relief



SOD-123FL



Schematic Symbol

MECHANICAL DATA

- | Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- | Polarity: Cathode line denotes the cathode end

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS AND CHARACTERISTICS (T_A=25°C)

Parameter		Symbol	ES1000 FL	ES1001 FL	ES1015 FL	ES1002 FL	ES1003 FL	ES1004 FL	ES1005 FL	ES1006 FL	Unit
Marking			ES1A	ES1B	ES1C	ES1D	ES1F	ES1G	ES1H	ES1J	
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS Voltage		V _{RMS}	35	70	105	140	210	280	350	420	
Maximum DC Blocking Voltage		V _{DC}	50	100	150	200	300	400	500	600	
Maximum Average Forward Rectified Current		I _{F(AV)}	1								A
Surge peak forward current,8.3ms single half sine-wave superimposed on rated load per diode		I _{FSM}	30								
Maximum forward voltage @I _F =1A,T _J =25°C(Note1)		V _F	0.95				1.3		1.7		V
Maximum Reverse Current @Rated V _R	T _J =25°C	I _R	5								μA
	T _J =125°C		100								
Typical Thermal Resistance		R _{θJ-A}	85								°C/W
		R _{θJ-L}	35								
Typical Junction Capacitance (Note 3)		C _J	16				18				pF
Operating Junction Temperature Rang		T _J	-55 to +150								°C
Storage Temperature Rang		T _{STG}	-55 to +150								
Maximum Reverse Recovery Time (Note 2)		t _{rr}	35								ns

Note 1: Pulse test with PW=300μs, 1% duty cycle

 Note 2: Reverse Recovery Test Conditions : I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

 Note 3: Measured at 1 MHz and Applied V_R=4.0 Volts

CHARACTERISTIC CURVES

Fig. 1- Maximum Forward Current Derating Curve

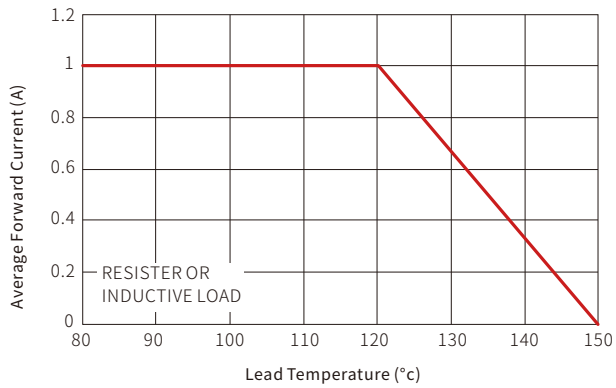


Fig. 2-Typical Instantaneous Forward Characteristics

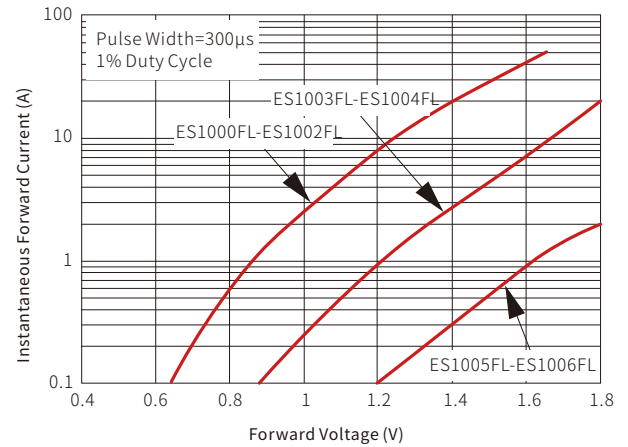


Fig. 3-maximum Non-repetitive Forward Peak Surge Current

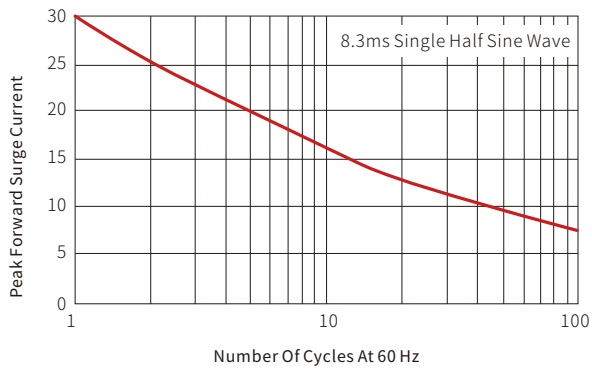


Fig. 4-Typical Reverse Characteristics

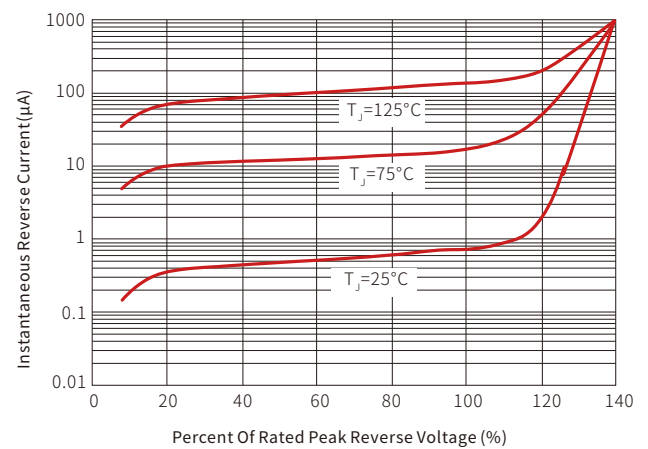
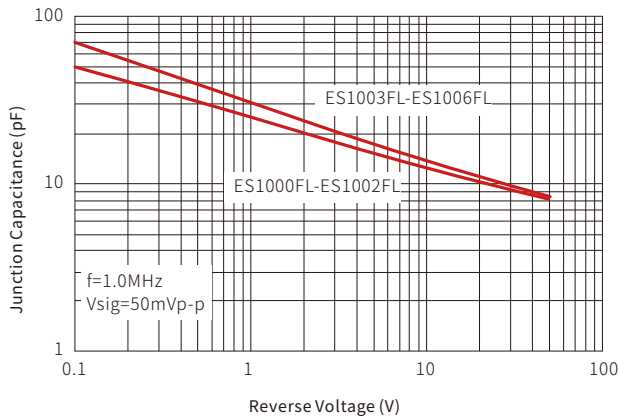
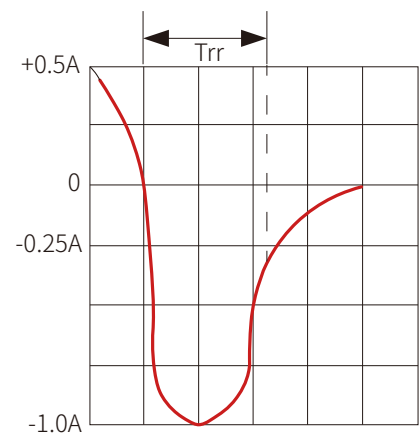
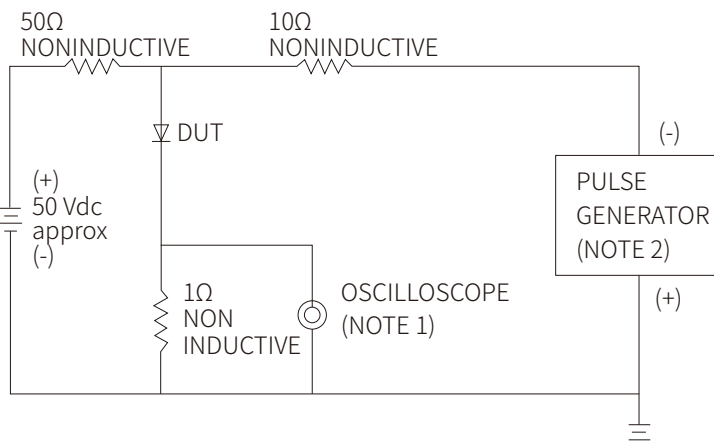
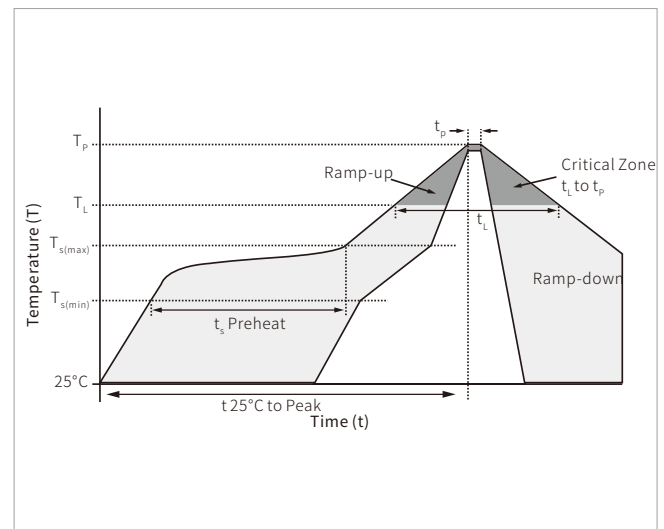


Fig. 5-Typical Junction Capacitance

Fig. 6-Reverse Recovery Time Characteristic And Test Circuit Diagram


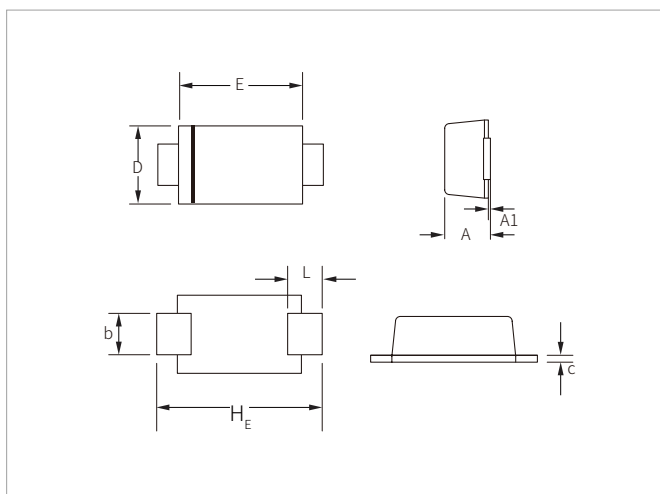
NOTES : 1. Rise Time = 7 ns max., Input Impedance = 1 megaohm, 22 pF
 2. Rise time = 10 ns max., Source Impedance = 50 ohms

SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C




SOD-123FL PACKAGE INFORMATION



Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.95	1.45	0.037	0.057
A1	0.00	0.10	0.000	0.004
b	0.70	1.20	0.028	0.047
c	0.05	0.30	0.002	0.012
D	1.50	2.00	0.059	0.079
E	2.50	3.10	0.098	0.122
L	0.35	0.90	0.014	0.035
H _E	3.40	3.90	0.134	0.154

RECOMMENDED PAD LAYOUT DIMENSIONS

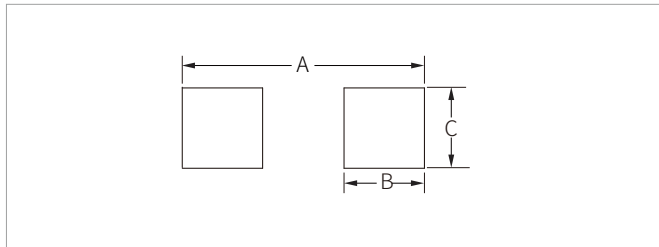

Ref.	Millimeters	Inches
A	4.20	0.165
B	1.50	0.059
C	1.20	0.047

ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Reel Size
ES1000-1006FL	SOD-123FL	3000PCS	7"

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.