

FEATURES

- | Low Cost
- | Low Leakage
- | Low Forward Voltage Drop
- | High Current Capability



DO-15

MECHANICAL DATA

- | Case: Molded Plastic
- | Epoxy: UL 94V-0 Rate Flame Retardant
- | Polarity: Color Band Denotes Cathode End

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS AND CHARACTERISTICS (T_A=25°C)

Parameter		Symbol	RL201	RL202	RL203	RL204	RL205	RL206	RL207	Unit
Marking			RL201	RL202	RL203	RL204	RL205	RL206	RL207	
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	
Maximum Average Forward Rectified Current at T _A = 75°C		I _{F(AV)}	2.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)		I _{FSM}	70							
Maximum Instantaneous Forward Voltage at 2.0A DC		V _F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A = 25°C	I _R	5.0							μA
	T _A = 100°C		500							
Maximum Full Load Reverse Current Average, Full Cycle .375*(9.5mm) lead length at T _L = 75°C				30						
Typical Junction Capacitance (Note)		C _J	20							pF
Typical Thermal Resistance		R _{θJA}	40							°C/W
Operating and Storage Temperature Range		T _J , T _{STG}	-55~+150							°C

NOTES : Measured at 1 MHZ and Applied Reverse Voltage of 4.0 Volts

CHARACTERISTIC CURVES

Fig.1 Typical Forward Current Derating Curve

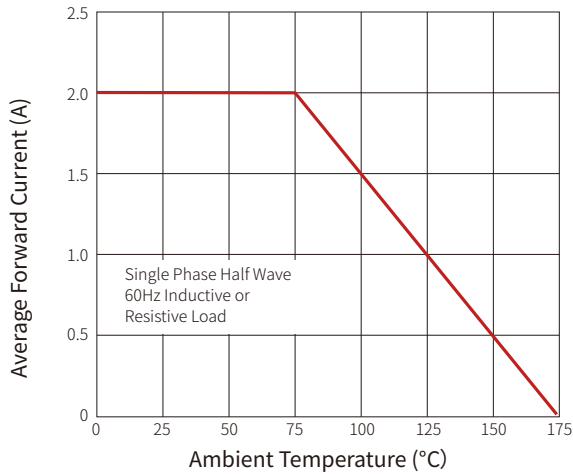


Fig.2 Typical Instantaneous Forward Characteristics

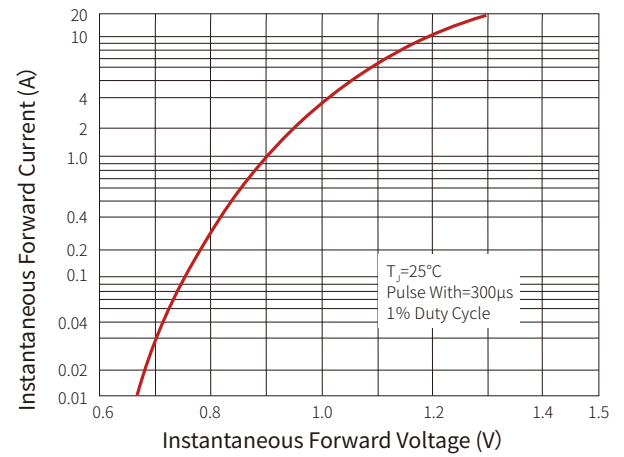


Fig.3 Maximum Non-Repetitive Forward Surge Current

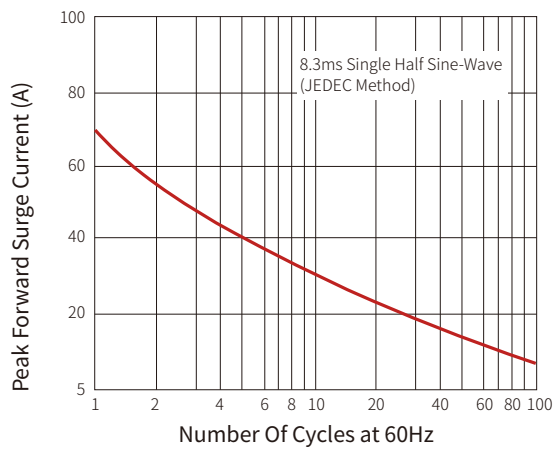


Fig.4 Typical Reverse Characteristics



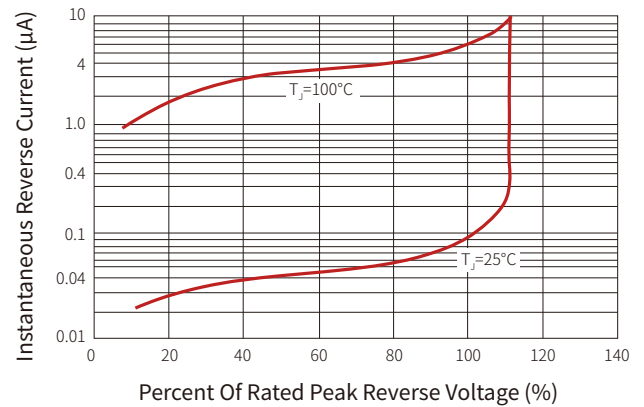



Fig.5 Typical Junction Capacitance


WAVE SOLDERING

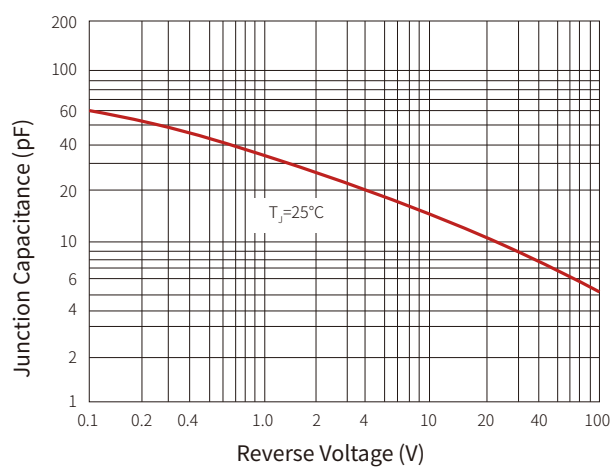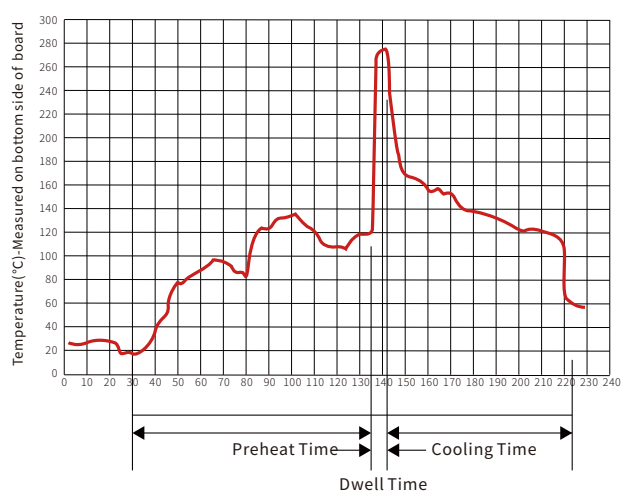

Wave Parameter		Lead-free assembly
Pre Heat	Temperature Min	100°C
	Temperature Max	150°C
	Time(min to max)	60 – 180 secs
Solder pot Temperature		280°C Max
Solder Dwell Time		2-5 seconds

DO-15 PACKAGE INFORMATION

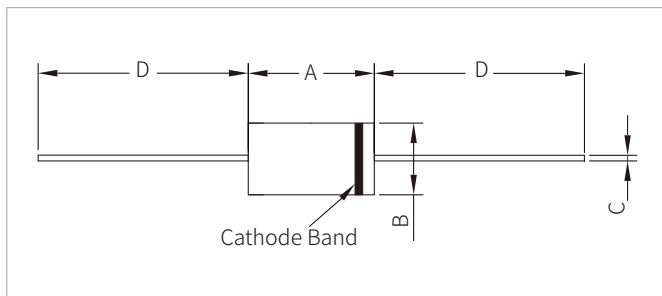

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	5.80	7.60	0.230	0.300
B	2.60	3.60	0.104	0.140
C	0.70	0.90	0.026	0.034
D	25.40	-	1.000	-

ORDERING INFORMATION

Part Number	Component Package	Per Carton	Description
RL201-RL207	DO-15	3000pcs	Box

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.