


FEATURES

- Compact, thin profile package design
- Ideal for SMT manufacturing
- Reliable robust construction



UMSB



Schematic Symbol

MECHANICAL DATA

- Case: UMSB
- Terminals: Solderable per MIL-STD-750, Method 2026

APPROVALS

RoHS Compliance with 2011/65/EU

MAXIMUM RATINGS AND CHARACTERISTICS ($T_A=25^{\circ}\text{C}$)

Parameter		Symbol	RMSB 40A	RMSB 40B	RMSB 40D	RMSB 40G	RMSB 40J	RMSB 40K	RMSB 40M	Unit
Marking			RMSB 40A	RMSB 40B	RMSB 40D	RMSB 40G	RMSB 40J	RMSB 40K	RMSB 40M	
Maximum repetitive peak reverse voltage		V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage		V _{RMS}	35	70	140	280	420	560	700	
Maximum DC blocking voltage		V _{DC}	50	100	200	400	600	800	1000	
Maximum Average Forward Rectified Current T _c =120°C		I _(AV)	4.0							A
Peak Forward Surge Current @ 8.3ms		I _{FSM}	125							
I²t Rating for fusing (1ms < t < 8.3ms)		I²t	64.8							A²S
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _J =25°C	I _R	5							µA
	T _J =125°C		500							
Maximum Reverse Recovery Time		T _{RR}	150				250	500		ns
Typical junction Capacitance per element (Note 1)		C _J	35							pF

Parameter		Symbol	RMSB 40A	RMSB 40B	RMSB 40D	RMSB 40G	RMSB 40J	RMSB 40K	RMSB 40M	Unit
Maximum Forward Voltage @ T _J = 25°C	@2.0A DC	V _F	1.3							V
	@4.0A DC		1.5							
Typical Thermal Capacitance (Note 2)		R _{θJC}	8							°C/W
		R _{θJL}	15							
		R _{θJA}	25							
Operating Temperature Range		T _J	-55 to +150							°C
Storage Temperature Range		T _{STG}	-55 to +150							°C

Notes:

1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC
2. Thermal Resistance test performed in accordance with JESD-51. Unit mounted on 15 mm*12 mm*1.6 mm AL pad attach 195 mm*110 mm*10 mm steel plate
3. The typical data above is for reference only

CHARACTERISTIC CURVES

Fig. 1- Forward Current Derating Curve

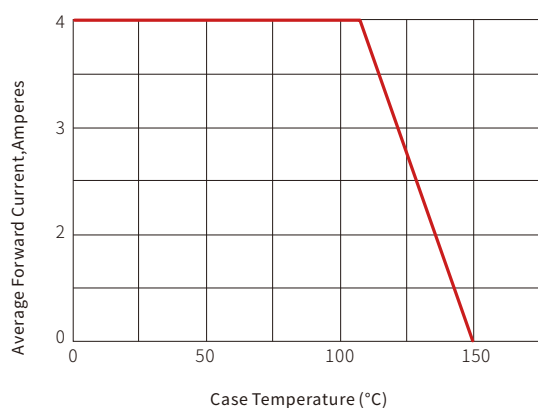


Fig. 2-Maximum Non-Repetitive Surge Current

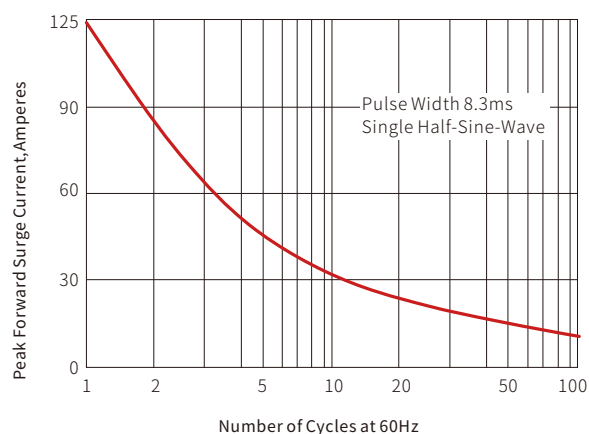


Fig. 3-Typical Forward Characteristics

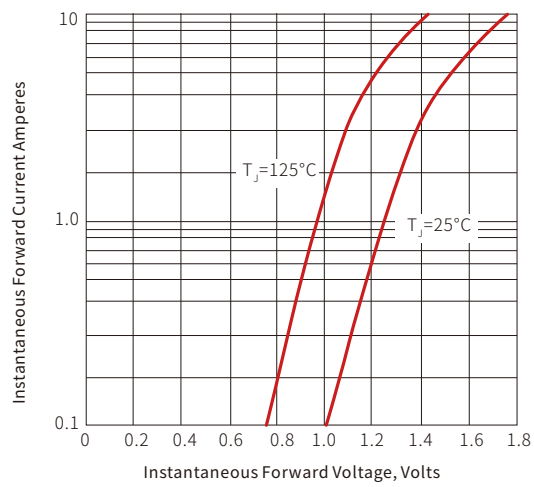


Fig. 4-Typical Revers Characteristics



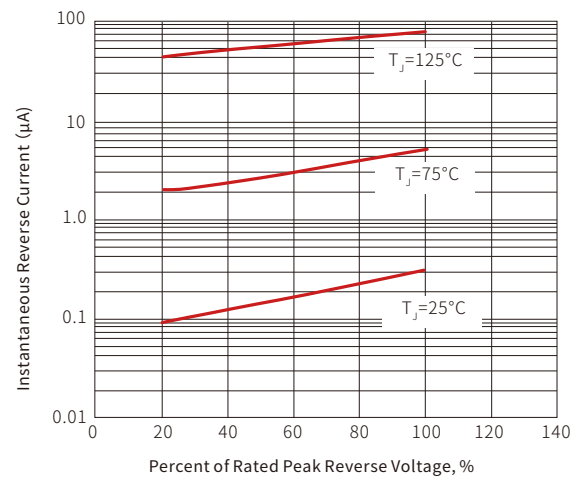


Fig. 5-Typical Junction Capacitance

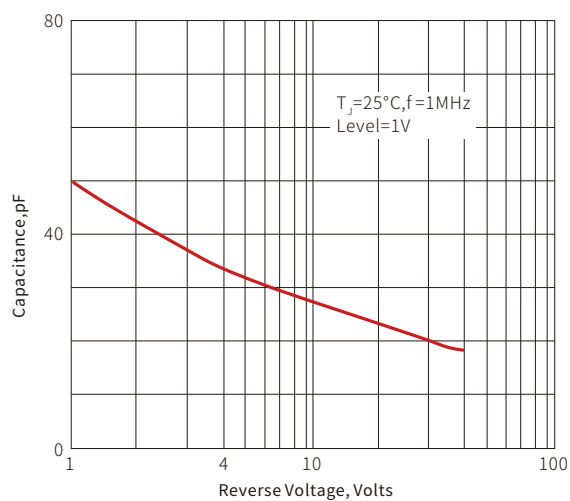


SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C

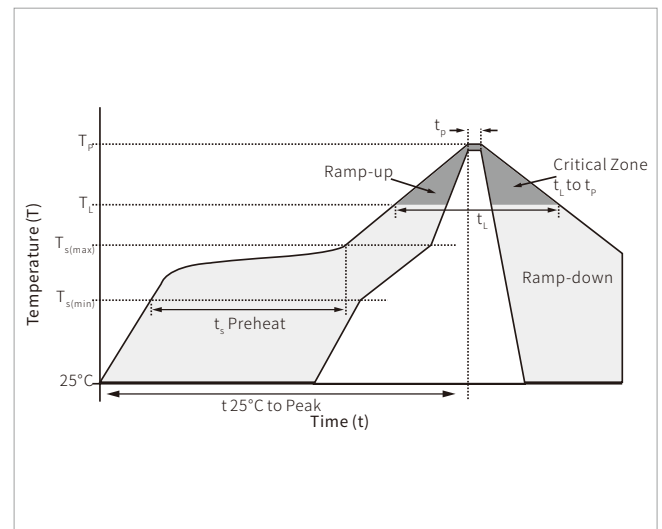

UMSB PACKAGE INFORMATION

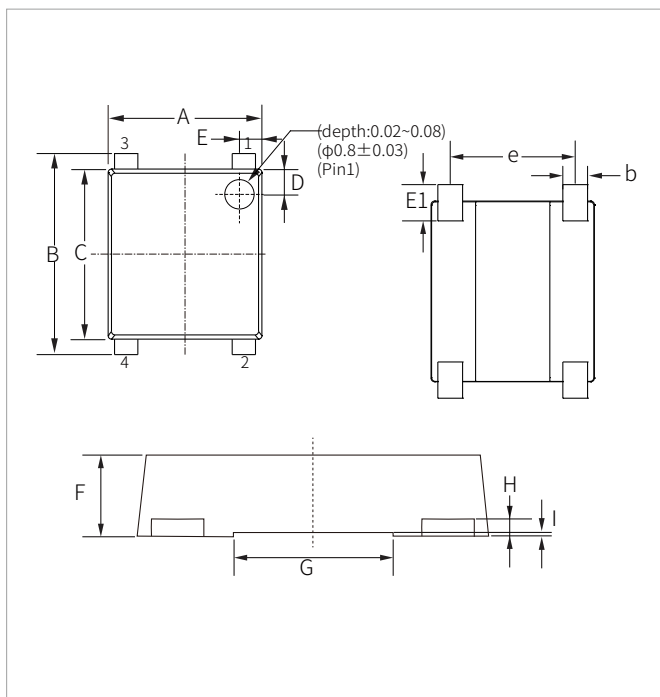

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	6.50	6.70	0.256	0.264
B	7.90	8.60	0.311	0.339
C	7.20	7.40	0.283	0.291
D	0.95	1.25	0.037	0.049
E	0.95	1.25	0.037	0.049
E1	0.65	1.05	0.026	0.041
e	5.00	5.20	0.197	0.205
b	0.95	1.15	0.037	0.045
F	1.30	1.50	0.051	0.059
G	2.90	3.10	0.114	0.122
H	0.27	0.40	0.011	0.016
I	0.04	0.08	0.002	0.003

ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Reel Size
RMSB40A-RMSB40M	UMSB	3000PCS	7"

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.