


FEATURES


- | Low Gate Charge
- | Low Crss
- | Fast Switching
- | Improved dv/dt and ESD Capability
- | 100% Avalanche energy test

APPLICATION

- | High Frequency Switched-Mode Power Supply
- | Electronic lamp ballasts
- | UPS



TO-220C



Schematic Symbol

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Parameter		Symbol	Value	Unit
Drain-Source Voltage		V_{DS}	800	V
Continuous Drain Current	$T_C=25^{\circ}\text{C}$	I_D	6.0*	A
	$T_C=100^{\circ}\text{C}$		4.0*	A
Plused Drain Current ^(note1)		I_{DM}	24	A
Gate-Source Voltage		V_{GS}	± 30	V
Avalanche Current ^(note1)		I_{AR}	6.0	A
Repetitive Avalanche Energy ^(note1)		E_{AR}	18	mJ
Single Pulsed Avalanche Energy ^(note2)		E_{AS}	418	mJ
Peak Diode Recovery ^(note3)		dv/dt	4.5	V/ns
Power Dissipation $T_C=25^{\circ}\text{C}$		P_D	140	W
Power Dissipation Derating Factor Above 25°C		$P_{D(DF)}$	1.12	W/°C
Maximum Temperature for Soldering		T_L	300	°C
Operating Junction Temperature Range		T_J	150	°C
Storage Temperature Range		T_{STG}	-55 to +150	°C
Thermal Resistance, Junction to Case		$R_{th(j-c)}$	0.89	°C/W
Thermal Resistance, Junction to Ambient		$R_{th(j-a)}$	62.5	°C/W

* Drain current limited by maximum junction temperature

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Off Characteristics						
Drain-source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	800			V
Breakdown Voltage Temperature Coefficient	ΔBV _{DSS} / ΔT _J	I _D =250uA, referenced to 25°C		0.7		V/°C
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =800V, V _{GS} =0V, T _C =25°C			1.0	μA
		V _{DS} =640V, T _C =125°C			100	μA
Gate Leakage Current	I _{GSS}	V _{GS} =30V ,V _{DS} =0V			100	nA
		V _{GS} =-30V ,V _{DS} =0V			-100	nA
On-characteristics						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	3.0		5.0	V
Drain-source On-resistance	R _{DS(on)}	V _{GS} =10V, I _D =3A		2.0	2.5	Ω
Forward Transconductance	g _{fs}	V _{DS} =40V, I _D =3A(note4)		3.0		S
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} = 25V, V _{GS} = 0V, f=1.0MHz		1400		pF
Output Capacitance	C _{oss}			135		pF
Reverse Transfer Capacitance	C _{rss}			10		pF
Turn-on Delay Time	t _{d(on)}	V _{DD} =400V,I _D =6A, R _G =25Ω (note 4,5)		35		ns
Turn-on Rise Time	t _r			110		ns
Turn-off Delay Time	t _{d(off)}			50		ns
Turn-off Fall Time	t _f			60		ns
Total Gate Charge	Q _g	V _{DS} =640V,I _D =6A,V _{GS} =10V (note 4,5)		30		nC
Gate-Source Charge	Q _{gs}			8.5		nC
Gate-Drain Charge	Q _{gd}			12		nC
Maximum Continuous Drain-source Diode Forward Current	I _S				6.0	A
Maximum Pulsed Drain-source Diode Forward Current	I _{SM}				24	A
Drain-source Diode Forward Voltage	V _{SD}	V _{GS} =0V,I _S =6A			1.4	V
Reverse Recovery Time	t _{rr}	V _{GS} =0V,I _S =6A dI _F /dt=100A/μs(note 4)		650		ns
Reverse Recovery Charge	Q _{rr}			7.0		μC

Notes:

1: Pulse width limited by maximum junction temperature
3: I_{SD} ≤ 6A, di/dt ≤ 300A/μs, V_{DD} ≤ BV_{DSS}, Starting T_J=25°C
5: Essentially independent of operating temperature

2: L=16mH, I_{AS}=6A, V_{DD}=50V, R_G=25Ω, Starting T_J=25°C
4: Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2%

CHARACTERISTIC CURVES

Fig.1 On-State Characteristics

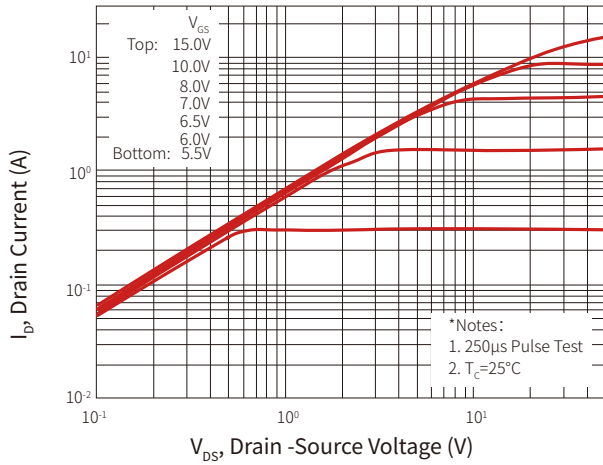


Fig.2 Transfer Characteristics

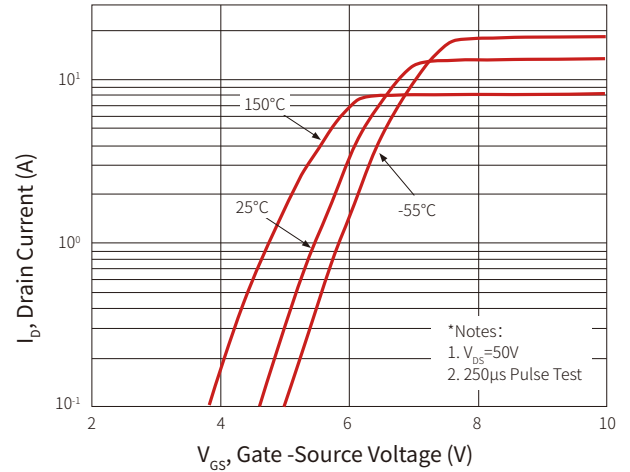


Fig.3 Breakdown Voltage Variation vs Temperature

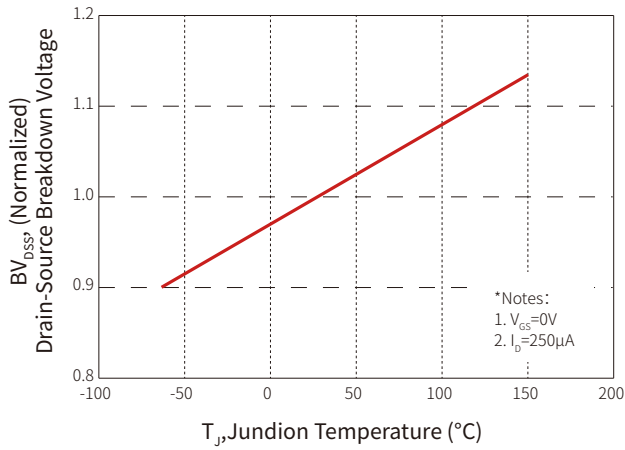
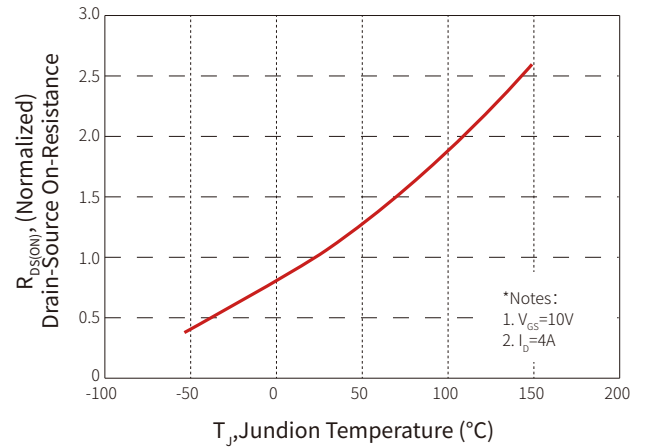


Fig. 4 On-Resistance Variation vs Temperature



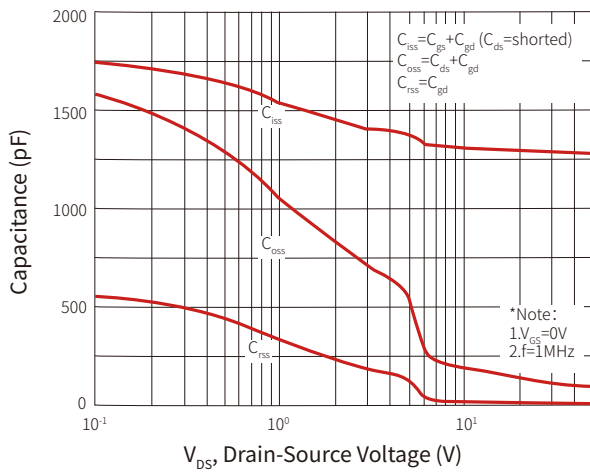
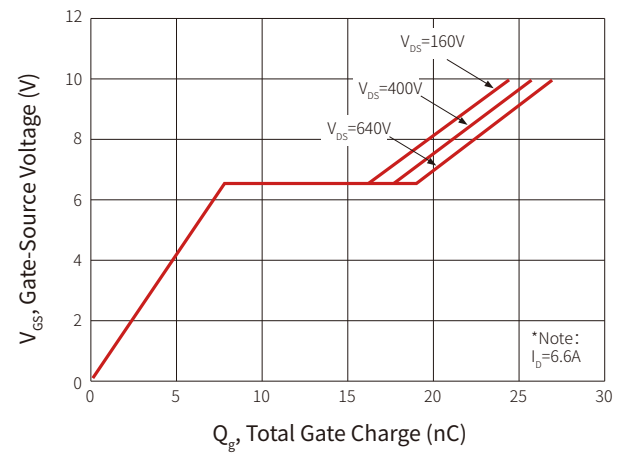
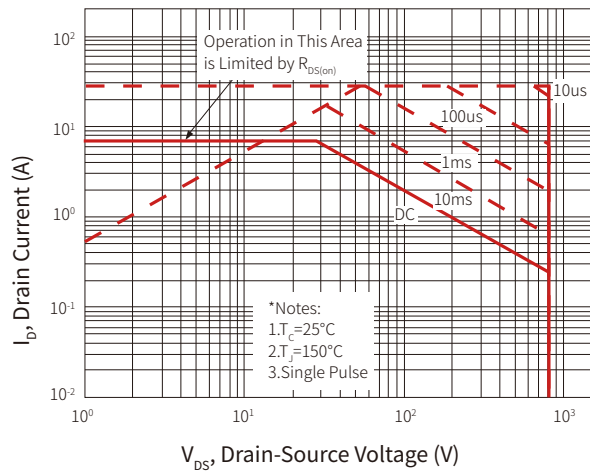
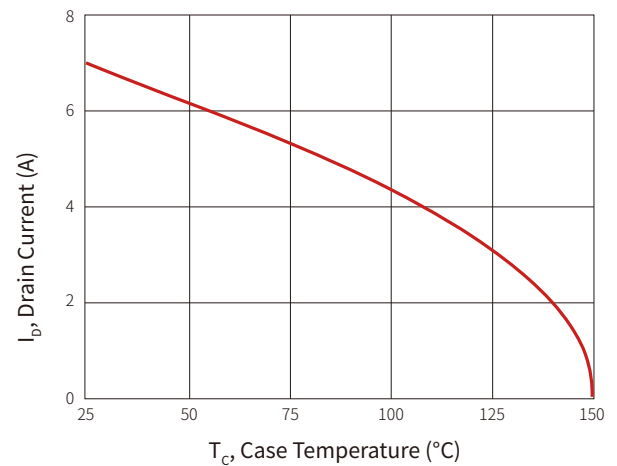
**Fig.5 Capacitance Characteristics****Fig. 6 Gate Charge Characteristics****Fig.7 Maximum Safe Operating Area****Fig.8 Maximum Drain Current vs Case Temperature**








Fig.9 Transient Thermal Response Curve

Fig.10 Resistive Switching Test Circuit & Waveforms


Fig.11 Gate Charge Test Circuit & Waveform

Fig.12 Unclamped Inductive Switching Test Circuit & Waveforms


TO-220C PACKAGE MECHANICAL DATA

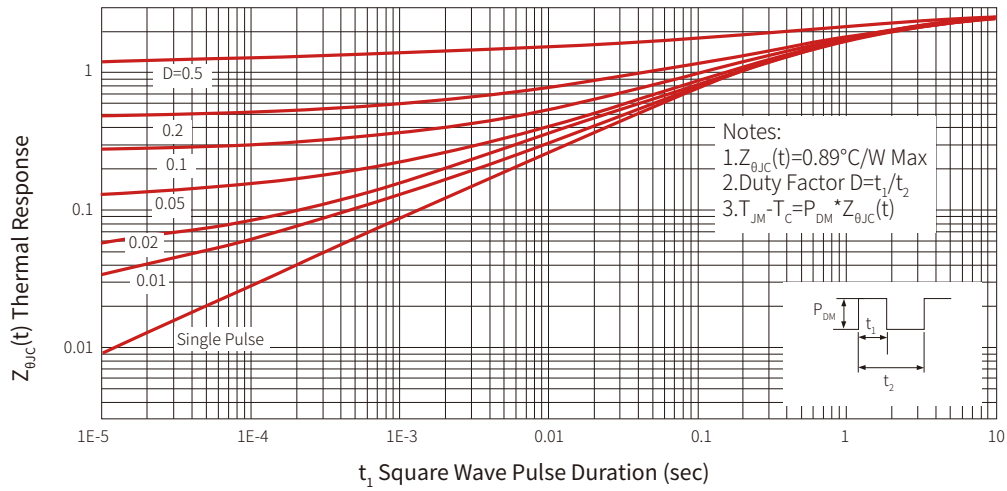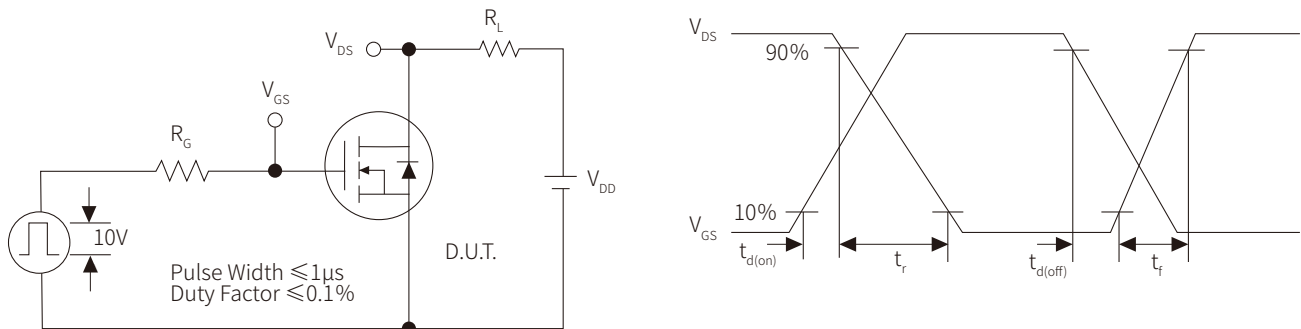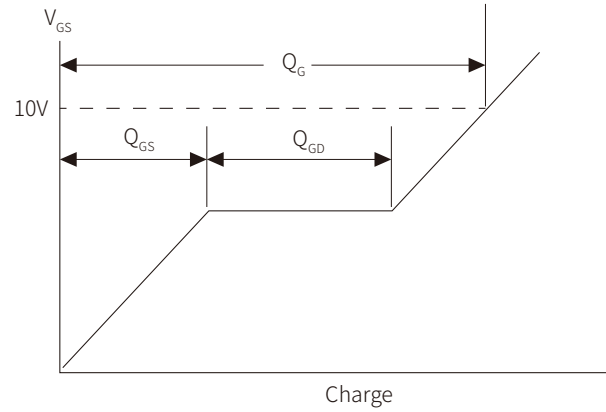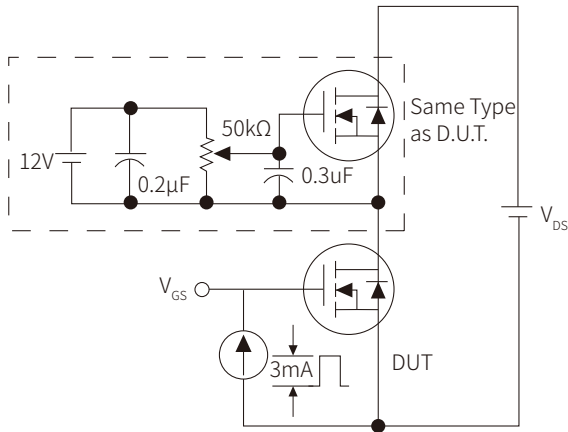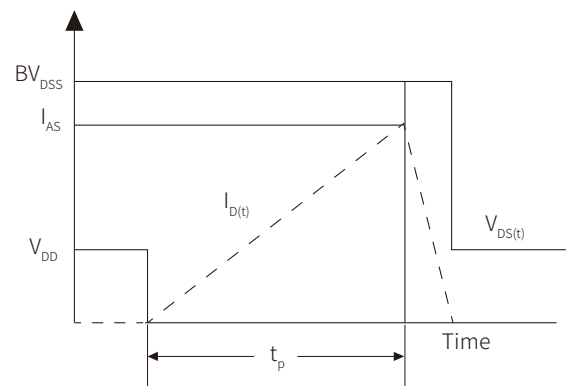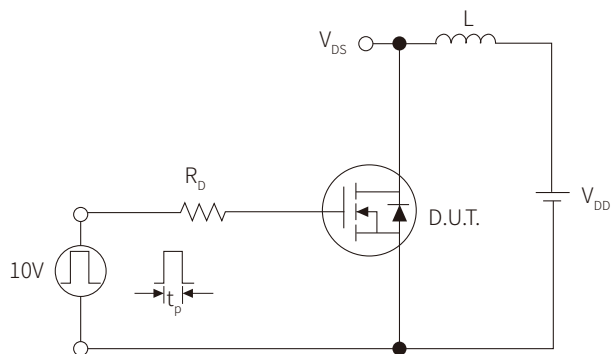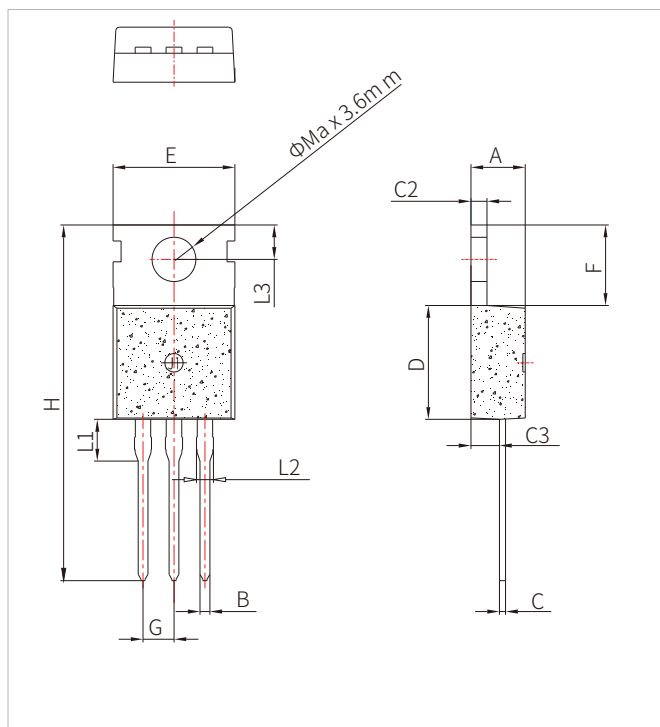

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.30		4.70	0.169		0.185
B	0.70		0.90	0.028		0.035
C	0.45		0.60	0.018		0.024
C2	1.23		1.32	0.048		0.052
C3	2.20		2.60	0.087		0.102
D	8.80		10.0	0.346		0.394
E	9.90		10.3	0.390		0.406
F	6.30		6.90	0.248		0.272
G		2.54			0.1	
H	28.0		30.0	1.102		1.181
L1		3.65			0.144	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
Φ		3.6			0.142	

ORDERING INFORMATION

Part Number	Component Package	Marking	QTY/Tube	Box	Carton
SNM6N80C	TO-220C	 6N80 XXXX	50PCS	1000PCS	5000PCS

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.